

The Obelisk

Fluted outdoor column wall light

A deeply fluted diffuser set in a solid black metal frame, standing against the wall: 60 to 120 cm of even, glare-free light, up to 3,960 lumens, in the white you choose.

PROJECT	
ROOM	
HEIGHT / WHITE	
QTY	
NOTES	





Fluted diffuser
No glare at eye level



Up to 3,960 lm
Integrated LED



Four heights
60 to 120 cm



Free UK delivery
4-8 working days

2-year warranty

Every Selden Home light is covered for two years against manufacturing defects.

30-day returns

Not right for the room? Return it within 30 days of delivery.

SPECIFICATIONS

Format	Outdoor column wall light, fluted design
Frame	Solid anti-corrosion metal, black finish
Diffuser	Fluted plastic, ribbed relief
Sizes	60 cm (18 W) · 75 cm (22 W) · 100 cm (32 W) · 120 cm (36 W) · all W 16 × D 12 cm
Light source	Integrated LED module, up to 3,960 lm
White	3000K, 4000K or 6000K, chosen per order, not adjustable
Dimmable	No · standard wall switch
Supply	AC 90-260 V · hardwired
Weatherproofing	Hermetically sealed chassis for outdoor use
Certification	CE, UL and RoHS
Installation	Professional installation advised
Best for	Front doors, porches, garden walls, terraces and driveway pillars

FITTED OUTSIDE



Regency portico



Coming home




On the gate piers



By the French doors

DIMENSIONS

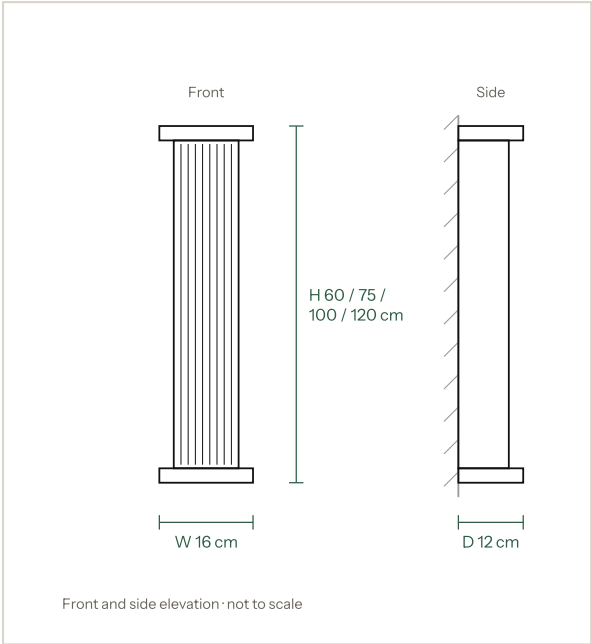

Width × depth	16 × 12 cm, every height
Heights	60, 75, 100 or 120 cm

PLACEMENT GUIDE

Beside a front door	One each side, the centre of the light at about head height.
On gate piers or pillars	Centred on the face of each pier, about two thirds of the way up.
Along a façade or garden wall	Space several evenly, about 1.5–2 m apart, at the same height.

DETAILS



Fluted diffuser under a black cap



Solid black metal frame

INSTALLATION & CARE

- Hermetically sealed chassis for outdoor use, built for rain, wind and dust.
- Must be connected to the mains by a qualified electrician, in line with current UK wiring regulations.
- Switch off at the mains before fitting, cleaning or changing a bulb.
- The LED module is integrated: there is no bulb to change.
- Wipe the frame and diffuser with a soft, damp cloth once switched off.